

Docklocs®


OVERDENTURE ATTACHMENT SYSTEM



Ordering Information



The New Standard in Overdenture Attachment Systems

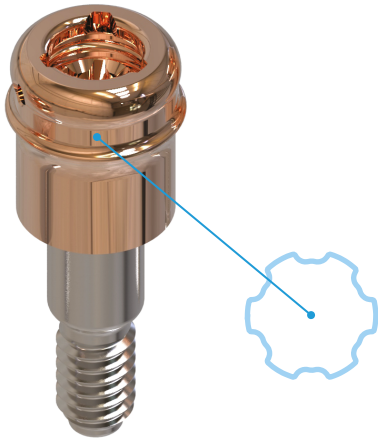

Innovative Coating Technology Patented

Our patented fully biocompatible ceramic PVD (physical vapor deposition) coating provides many advantages over alternative abutment coatings.

Comprised of a tremendously hard layer of Zirconium Carbon Nitride (ZrCN), the abutment coating is more resistant to abrasion and wear compared to other common coatings. Additionally, its impressive rose gold tone blends well with the gingiva and provides a premium appearance.

Double Insert Connection


In addition to the compatible tri-lobe drive mechanism, Docklocs abutments feature the Bredent Torx® mechanism in the center of the abutment for simple seating using commonly available drivers. This ensures that the abutments meet the needs of a wide variety of clinicians without requiring the purchase of additional tooling.

Precision Retention Inserts



High Performance Polymer

These retention inserts have a lower tendency to absorb water and a high resistance to chemicals and fats, including alcoholic disinfectants. The inserts are extremely durable and have an excellent dynamic load capacity.

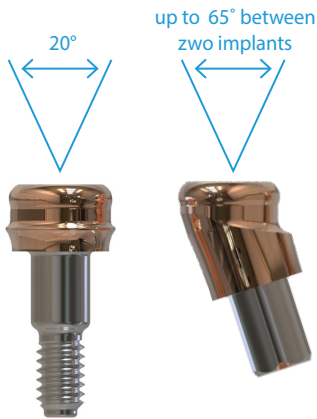

Docklocs
Straight Abutment


Docklocs
18° Angled Abutment

18° Angled Abutments

The availability of 18° angled abutments allows for the restoration of implants with up to 65° of divergence between them. This is a vast improvement over competitive systems that are not indicated for divergence over 20°. Further simplifying abutment placement are Docklocs indexing features and set screws, which allow angled abutments to be quickly and easily seated in the desired orientation.

Enhanced Denture Housings

The Docklocs Denture Cap has additional grooves and anti-rotational flat sections for improved retention and increased resistance to vertical and horizontal movements. The red anodized surface improves the aesthetics as grey titanium denture caps tend to shine through the surface of thin acrylic dentures.




Docklocs
Enhanced Denture Cap



Docklocs High Performance Polymer (HPP) Retention Inserts

Low tendency to absorb water and high resistance to chemicals and fats. Available in Processing Pack configurations or Replacement Packs in quantities of 8 per package. Conveniently packaged on trays for easy pickup with the Docklocs Universal Tool.



Processing Pack (Standard), 0°-10°



Processing Pack (Extended Pivot), 10°-20°

REF	Description
-----	-------------

Processing Packs with High Performance Polymer Retention Inserts



SKYDLHSP	Docklocs® HPP Standard Processing Set - 2 Set	
SKYDLHEP	Docklocs® HPP Extended Processing Set - 2 Set	

Denture Caps

SKYDLEDC	Docklocs® Enhanced Denture Cap 4 Pack	
----------	---------------------------------------	--

Standard High Performance Polymer Retention Inserts 0° - 10°



SKYDLBLU	Docklocs® HPP Blue Insert 8 Pack	
SKYDLPIN	Docklocs® HPP Pink Insert 8 Pack	
SKYDLCLR	Docklocs® HPP Clear Insert 8 Pack	




Extended Pivot High Performance Polymer Retention Inserts 10° - 20°



SKYDLGRY	Docklocs® HPP Grey Insert 8 Pack	
SKYDLRED	Docklocs® HPP Red Insert 8 Pack	
SKYDLOGE	Docklocs® HPP Orange Insert 8 Pack	
SKYDLGRN	Docklocs® HPP Green Insert 8 Pack	

REF	Description
-----	-------------



Lab Processing

SKYDLA4	Docklocs® Lab Analog 4 Pack	
SKYDLIC4	Docklocs® Impression Coping 4 Pack	
SKYDLPS4	Docklocs® Processing Spacer 4 Pack	

Replacement Components

SKYDLBPI	Docklocs® Black Processing Insert 4 Pack	
----------	--	---

Tools and Drivers

SKYDLUI2	Docklocs® Universal Instrument 2-piece	
SKYDLTLD	Docklocs® Tri-Lobe Driver contra-angle (27 mm)	

Straight Abutments



Implant Platform	Cuff Height				
	1 mm	2 mm	3 mm	4 mm	6 mm

SKY

SKYDL010	SKYDL020	SKYDL030	SKYDL040	SKYDL060
----------	----------	----------	----------	----------

copaSKY

COPDL010	COPDL020	COPDL030	COPDL040	COPDL060
----------	----------	----------	----------	----------

Angled Abutments

18° Angled Abutments



Implant Platform	Cuff Height		
	2 mm	4 mm	5 mm

SKY

SKYDL182	SKYDL184	SKYDL185
----------	----------	----------

copaSKY

COPDL182	COPDL184	COPDL185
----------	----------	----------

